



Week 7: *Strings*

🏛️ EMSE 4571 / 6571: Intro to Programming for Analytics

👤 John Paul Helveston

📅 February 29, 2024


Quiz 4

10 : 00

Write your name on the quiz!

Rules:

- Work alone; no outside help of any kind is allowed.
- No calculators, no notes, no books, no computers, no phones.

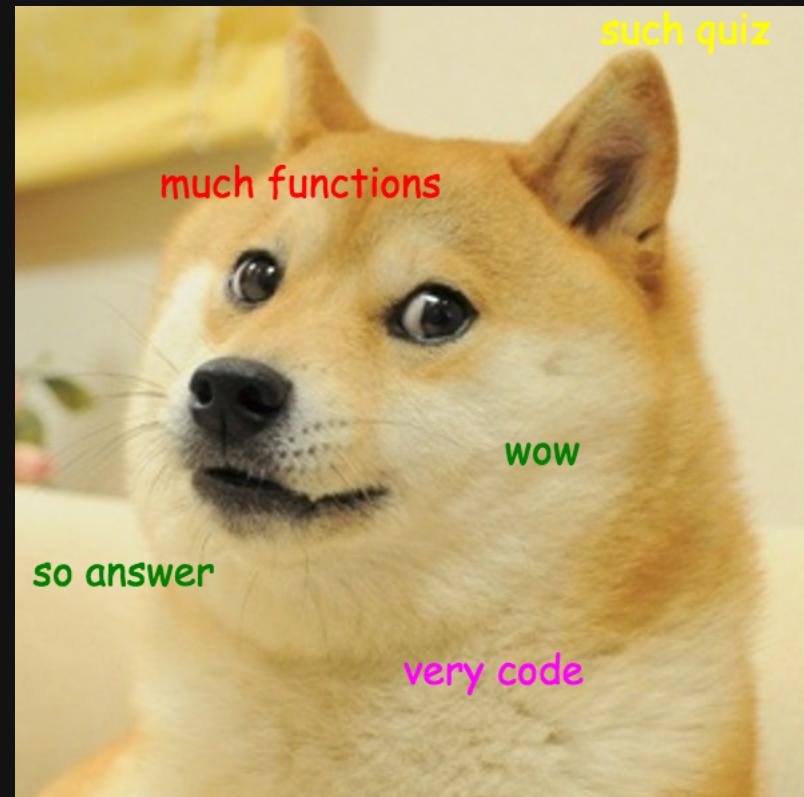

Week 7: *Strings*

1. Making strings
2. Case conversion & substrings
3. Padding, splitting, & merging
4. Detecting & replacing

BREAK

Week 7: *Strings*

1. Making strings
2. Case conversion & substrings
3. Padding, splitting, & merging
4. Detecting & replacing

BREAK

Install the `stringr` library

```
install.packages("stringr")
```

(Only do this once...and you already did this in HW 2)

Load the `stringr` library

```
library(stringr)
```

(Do this every time you use the package)

Make a string with 'single' or "double" quotes

```
cat("This is a string")
```

```
#> This is a string
```

```
cat('This is a string')
```

```
#> This is a string
```

Use single vs. double quotes where it makes sense

Use double quotes when ' is in the string

```
cat("It's great!")
```

```
#> It's great!
```

Use single quotes when " is in the string

```
cat('I said, "Hello"' )
```

```
#> I said, "Hello"
```

What if a string has both ' and " symbols?

Example: It's nice to say, "Hello"

```
cat("It's nice to say, \"Hello\"")
```

```
#> Error: <text>:1:25: unexpected symbol
#> 1: cat("It's nice to say, "Hello
#>          ^
```

```
cat('It's nice to say, "Hello"')
```

```
#> Error: <text>:1:9: unexpected symbol
#> 1: cat('It's
#>          ^
```

"Escaping" to the rescue!

Use the \ symbol to "escape" a literal symbol

```
cat("It's nice to say, \"Hello\\\"") # Double quote
```

```
#> It's nice to say, "Hello"
```

```
cat('It\'s nice to say, "Hello"'') # Single quote
```

```
#> It's nice to say, "Hello"
```

Commonly escaped symbols

New line: \n

```
cat('This\nthat')
```

```
#> This  
#> that
```

Tab space: \t

```
cat('This\tthat')
```

```
#> This      that
```

Backslash: \\

```
cat('This\\that')
```

```
#> This\\that
```

String constants: Sets of common strings

letters

```
#> [1] "a" "b" "c" "d" "e" "f" "g" "h" "i" "j" "k" "l" "m" "n" "o" "p" "q" "r" "s" "t"  
"u" "v" "w" "x" "y" "z"
```

LETTERS

```
#> [1] "A" "B" "C" "D" "E" "F" "G" "H" "I" "J" "K" "L" "M" "N" "O" "P" "Q" "R" "S" "T"  
"U" "V" "W" "X" "Y" "Z"
```

String constants: Sets of common strings

month.name

```
#> [1] "January"   "February"  "March"      "April"       "May"        "June"       "July"  
"August"     "September" "October"    "November"   "December"
```

month.abb

```
#> [1] "Jan" "Feb" "Mar" "Apr" "May" "Jun" "Jul" "Aug" "Sep" "Oct" "Nov" "Dec"
```

The **stringr** library has a few *longer* string constants: fruit, words, sentences

```
length(fruit)
```

```
#> [1] 80
```

```
fruit[1:4]
```

```
#> [1] "apple"    "apricot"   "avocado"  "banana"
```

```
length(words)
```

```
#> [1] 980
```

```
words[1:4]
```

```
#> [1] "a"          "able"       "about"  
"absolute"
```

```
length(sentences)
```

```
#> [1] 720
```

```
sentences[1:4]
```

```
#> [1] "The birch canoe slid on the smooth  
planks."  "Glue the sheet to the dark blue  
background."  "It's easy to tell the depth of  
a well."      "These days a chicken leg is a  
rare dish."
```

Week 7: *Strings*

1. Making strings
2. Case conversion & substrings
3. Padding, splitting, & merging
4. Detecting & replacing

BREAK

Case conversion & substrings

Function	Description
<code>str_to_lower()</code>	converts string to lower case
<code>str_to_upper()</code>	converts string to upper case
<code>str_to_title()</code>	converts string to title case
<code>str_length()</code>	number of characters
<code>str_sub()</code>	extracts substrings
<code>str_locate()</code>	returns indices of substrings
<code>str_dup()</code>	duplicates characters

Case conversion

```
x <- "Want to hear a joke about paper? Never mind, it's tearable."
```

```
str_to_lower(x)
```

```
#> [1] "want to hear a joke about paper? never mind, it's tearable."
```

```
str_to_upper(x)
```

```
#> [1] "WANT TO HEAR A JOKE ABOUT PAPER? NEVER MIND, IT'S TEARABLE."
```

```
str_to_title(x)
```

```
#> [1] "Want To Hear A Joke About Paper? Never Mind, It's Tearable."
```

Comparing strings

Case matters:

```
a <- "Apples"  
b <- "apples"  
a == b
```

```
#> [1] FALSE
```

Convert case *before* comparing if you want to compare the string text without casing:

```
str_to_lower(a) == str_to_lower(b)
```

```
#> [1] TRUE
```

```
str_to_upper(a) == str_to_upper(b)
```

```
#> [1] TRUE
```

Get the number of characters in a string

The `length()` function returns the *vector length*: To get the # of characters, use `str_length()`:

```
length("hello world")
```

```
str_length("hello world")
```

```
#> [1] 1
```

```
#> [1] 11
```

```
str_length(" ") # Spaces count
```

```
#> [1] 1
```

```
str_length("") # Empty string
```

```
#> [1] 0
```

Access characters by their index with `str_sub()`

Indices start at 1:

```
str_sub("Apple", 1, 3)
```

```
#> [1] "App"
```

Negative numbers count backwards from end:

```
str_sub("Apple", -3, -1)
```

```
#> [1] "ple"
```

Modify a string with `str_sub()`:

```
x <- 'abcdef'  
str_sub(x, 1, 3) <- 'ABC'  
x
```

```
#> [1] "ABCdef"
```

Get the indices of substrings

Extract the substring "Good" from the following string:

```
x <- 'thisIsGoodPractice'
```

1): Use `str_locate()` to get the **start** and **end** indices:

```
indices <- str_locate(x, 'Good')
indices
```

```
#>      start end
#> [1,]    7   10
```

2): Use `str_sub()` to get the substring:

```
str_sub(x, indices[1], indices[2])
```

```
#> [1] "Good"
```

Repeat a string with `str_dup()`

```
str_dup("holla", 3)
```

```
#> [1] "hollahollaholla"
```

Note the difference with `rep()`:

```
rep("holla", 3)
```

```
#> [1] "holla" "holla" "holla"
```

stringr functions work on vectors

```
x <- c("apples", "oranges")  
x
```

```
#> [1] "apples"  "oranges"
```

Get the first 3 letters in each string:

```
str_sub(x, 1, 3)
```

```
#> [1] "app" "ora"
```

Duplicate each string twice

```
str_dup(x, 2)
```

```
#> [1] "applesapples"    "orangesoranges"
```

05:00

Quick practice

Create this string object:

```
x <- 'thisIsGoodPractice'
```

Then use **stringr** functions to transform `x` into the following strings:

- `'thisIsGood'`
- `'practice'`
- `'GOOD'`
- `'thisthisthis'`
- `'GOODGOODGOOD'`

Hint: You'll need these:

- `str_to_lower()`
- `str_to_upper()`
- `str_locate()`
- `str_sub()`
- `str_dup()`

Week 7: *Strings*

1. Making strings
2. Case conversion & substrings
3. Padding, splitting, & merging
4. Detecting & replacing

BREAK

Padding, splitting, & merging

Function	Description
<code>str_trim()</code>	removes leading and trailing whitespace
<code>str_pad()</code>	pads a string
<code>paste()</code>	string concatenation
<code>str_split()</code>	split a string into a vector

Remove excess white space with `str_trim()`

```
x <- "aStringWithSpace"  
x
```

```
#> [1] "aStringWithSpace"
```

```
str_trim(x) # Trims both sides by default
```

```
#> [1] "aStringWithSpace"
```

```
str_trim(x, side = "left") # Only trim left side
```

```
#> [1] "aStringWithSpace"
```

```
str_trim(x, side = "right") # Only trim right side
```

```
#> [1] "aStringWithSpace"
```

Add white space (or other characters) with `str_pad()`

```
x <- "hello"  
x
```

```
#> [1] "hello"
```

```
str_pad(x, width = 10) # Inserts pad on left by default
```

```
#> [1] "      hello"
```

```
str_pad(x, width = 10, side = "both") # Pad both sides
```

```
#> [1] "  hello  "
```

```
str_pad(x, width = 10, side = "both", pad = '*') # Specify the pad
```

```
#> [1] "**hello***"
```

Combine strings into one string with `paste()`

```
paste('x', 'y', 'z')
```

```
#> [1] "x y z"
```

Control separation with `sep` argument (default is "`" "`):

```
paste('x', 'y', 'z', sep = "-")
```

```
#> [1] "x-y-z"
```

Combine strings into one string with `paste()`

Note the difference with *vectors* of strings:

```
paste(c('x', 'y', 'z'))
```

```
#> [1] "x" "y" "z"
```

To make a single string from a vector of strings, use `collapse`:

```
paste(c('x', 'y', 'z'), collapse = "")
```

```
#> [1] "xyz"
```

Split a string into multiple strings with `str_split()`

```
x <- 'This string has spaces-and-dashes'
```

```
x
```

```
#> [1] "This string has spaces-and-dashes"
```

```
str_split(x, " ") # Split on the spaces
```

```
#> [[1]]
```

```
#> [1] "This"
```

```
      "string"
```

```
      "has"
```

```
      "spaces-and-dashes"
```

```
str_split(x, "-") # Split on the dashes
```

```
#> [[1]]
```

```
#> [1] "This string has spaces" "and"
```

```
                  "dashes"
```

What's with the `[[1]]` thing?

`str_split()` returns a `list` of vectors

```
x <- c('babble', 'scrabblebabble')
str_split(x, 'bb')
```

```
#> [[1]]
#> [1] "ba" "le"
#>
#> [[2]]
#> [1] "scra" "leba" "le"
```

If you're only splitting one string, add `[[1]]` to get the first vector:

```
str_split('hooray', 'oo')[[1]]
```

```
#> [1] "h"    "ray"
```

Common splits (**memorize these!**)

Splitting on `" "` breaks a string into *characters*:

```
str_split("apples", "")[[1]]
```

```
#> [1] "a" "p" "p" "l" "e" "s"
```

Splitting on `" "` breaks a *sentence* into words:

```
x <- "If you want to view paradise, simply look around and view it"  
str_split(x, " ")[[1]]
```

```
#> [1] "If"           "you"          "want"         "to"           "view"         "paradise," "simply"  
"look"        "around"        "and"          "view"         "it"
```

05:00

Quick practice:

Create the following objects:

```
x <- 'this_is_good_practice'  
y <- c('hello', 'world')
```

Use `stringr` functions to transform `x` and `y` into the following:

- "hello world"
- "***hello world***"
- c("this", "is", "good", "practice")
- "this is good practice"
- "hello world, this is good practice"

Hint: You'll need these:

- `str_trim()`
- `str_pad()`
- `paste()`
- `str_split()`

15:00

Your turn

1) reverseString(s)

Write a function that returns the string **s** in reverse order.

- `reverseString("aWordWithCaps") == "spaChtiWdroWa"`
- `reverseString("abcde") == "edcba"`
- `reverseString("") == ""`

2) isPalindrome(s)

Write a function that returns **TRUE** if the string **s** is a Palindrome and **FALSE** otherwise.

- `isPalindrome("abcba") == TRUE`
- `isPalindrome("abcb") == FALSE`
- `isPalindrome("321123") == TRUE`

Break

05 : 00

Week 7: *Strings*

1. Making strings
2. Case conversion & substrings
3. Padding, splitting, & merging

BREAK

4. Detecting & replacing

Detecting & replacing

Function	Description
<code>str_sort()</code>	sort a string alphabetically
<code>str_order()</code>	get the order of a sorted string
<code>str_detect()</code>	match a string in another string
<code>str_replace()</code>	replace a string in another string

Sort string vectors alphabetically with `str_sort()`

```
x <- c('Y', 'M', 'C', 'A')  
x
```

```
#> [1] "Y" "M" "C" "A"
```

```
str_sort(x)
```

```
#> [1] "A" "C" "M" "Y"
```

```
str_sort(x, decreasing = TRUE)
```

```
#> [1] "Y" "M" "C" "A"
```

Detect pattern in string: `str_detect(string, pattern)`

```
tenFruit <- fruit[1:10]  
tenFruit
```

```
#> [1] "apple"        "apricot"       "avocado"      "banana"       "bell pepper"  
"bilberry"      "blackberry"    "blackcurrant" "blood orange" "blueberry"
```

```
str_detect(tenFruit, "berry")
```

```
#> [1] FALSE FALSE FALSE FALSE FALSE  TRUE  TRUE FALSE FALSE  TRUE
```

How many in vector have the string "berry"?

```
sum(str_detect(tenFruit, "berry"))
```

```
#> [1] 3
```

Count number of times pattern appears in string

`str_count(string, pattern)`

```
x <- c("apple", "banana", "pear")
str_count(x, "a")
```

```
#> [1] 1 3 1
```

Note the difference with `str_detect()`:

```
str_detect(x, "a")
```

```
#> [1] TRUE TRUE TRUE
```

Detect if string *starts* with pattern

Which fruits **start** with "a"?

```
fiveFruit <- fruit[1:5]  
fiveFruit
```

```
#> [1] "apple"        "apricot"       "avocado"      "banana"       "bell pepper"
```

Wrong:

```
str_detect(fiveFruit, "a")
```

```
#> [1] TRUE  TRUE  TRUE  TRUE FALSE
```

Right:

```
str_detect(fiveFruit, "^a")
```

```
#> [1] TRUE  TRUE  TRUE FALSE FALSE
```

Detect if string *ends* with pattern

Which fruits **end** with an "e"?

```
fiveFruit
```

```
#> [1] "apple"        "apricot"       "avocado"      "banana"       "bell pepper"
```

Wrong:

```
str_detect(fiveFruit, "e")
```

```
#> [1] TRUE FALSE FALSE FALSE TRUE
```

Right:

```
str_detect(fiveFruit, "e$")
```

```
#> [1] TRUE FALSE FALSE FALSE FALSE
```

Remember:

If you *start* with power (^), you'll *end* up with money (\$).

```
fiveFruit
```

```
#> [1] "apple"      "apricot"     "avocado"    "banana"     "bell pepper"
```

```
str_detect(fiveFruit, "aa") # Start with power (^)
```

```
#> [1] TRUE  TRUE  TRUE FALSE FALSE
```

```
str_detect(fiveFruit, "e$") # End with money ($)
```

```
#> [1] TRUE FALSE FALSE FALSE FALSE
```

05:00

Quick practice:

```
fruit[1:5]
```

```
#> [1] "apple"        "apricot"       "avocado"      "banana"       "bell pepper"
```

Use `stringr` functions to answer the following questions about the `fruit` vector:

1. How many fruit have the string "`rr`" in it?
2. Which fruit end with string "`fruit`"?
3. Which fruit contain more than one "`o`" character?

Hint: You'll need to use `str_detect()` and `str_count()`

Replace matched strings with new string

`str_replace(string, pattern, replacement)`

```
x <- c("apple", "pear", "banana")
```

```
str_replace(x, "a", "-") # Only replaces the first match
```

```
#> [1] "-pple"  "pe-r"    "b-nana"
```

```
str_replace_all(x, "a", "-") # Replaces all matches
```

```
#> [1] "-pple"  "pe-r"    "b-n-n-"
```

Quick practice redux

```
x <- 'this_is_good_practice'
```

Convert `x` into: "this is good practice"

We did this earlier:

```
paste(str_split(x, "_")[[1]], collapse = " ")
```

```
#> [1] "this is good practice"
```

But now we can do this!

```
str_replace_all(x, "_", " ")
```

```
#> [1] "this is good practice"
```

15:00

Your turn

1) `sortString(s)`: Write the function `sortString(s)` that takes a string `s` and returns back an alphabetically sorted string.

- `sortString("cba") == "abc"`
- `sortString("abedhg") == "abdegh"`
- `sortString("AbacBc") == "aAbBcc"`

2) `areAnagrams(s1, s2)`: Write the function `areAnagrams(s1, s2)` that takes two strings, `s1` and `s2`, and returns `TRUE` if the strings are anagrams, and `FALSE` otherwise. **Treat lower and upper case as the same letters.**

- `areAnagrams("", "") == TRUE`
- `areAnagrams("aabbccdd", "bbccdde") == FALSE`
- `areAnagrams("TomMarvoloRiddle", "IAmLordVoldemort") == TRUE`

Homework 7

- Deadline extended one week to the Wednesday *after* the midterm: **March 13**

Midterm

- In class next week.
- 100 minutes (finish by 2:25pm).
- You can bring a single 8.5×11 sheet of paper (front & back) with anything on it.
- You must turn in your note sheet with your exam (I'll give it back after grading).