



# Week 9: *Data Wrangling*

🏛️ EMSE 4571: Intro to Programming for Analytics

👤 John Paul Helveston

📅 March 30, 2023


# Quiz 5

10:00

Write your name on the quiz!

## Rules:

- Work alone; no outside help of any kind is allowed.
- No calculators, no notes, no books, no computers, no phones.

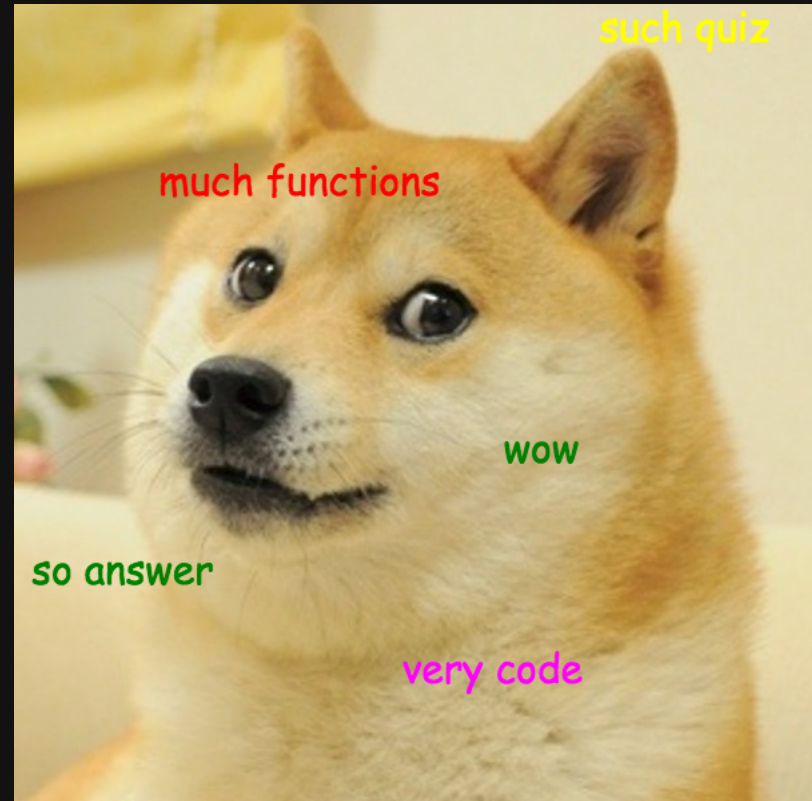

# Week 9: *Data Wrangling*

1. Selecting & filtering

2. Sequences with pipes

**BREAK**

3. Creating new variables

4. Grouped operations

# Week 9: *Data Wrangling*

1. **Selecting & filtering**

2. Sequences with pipes

**BREAK**

3. Creating new variables

4. Grouped operations

# Before we start

Make sure you have the "tidyverse" installed

```
install.packages('tidyverse')
```

(this is at the top of the `practice.R` file)

Remember: you only need to install packages once!

The tidyverse: `stringr` + `dplyr` + `readr` + `ggplot2` + ...




Art by [Allison Horst](#)

# Today: better data wrangling with **dplyr**



Art by [Allison Horst](#)

# 80% of the job is data wrangling

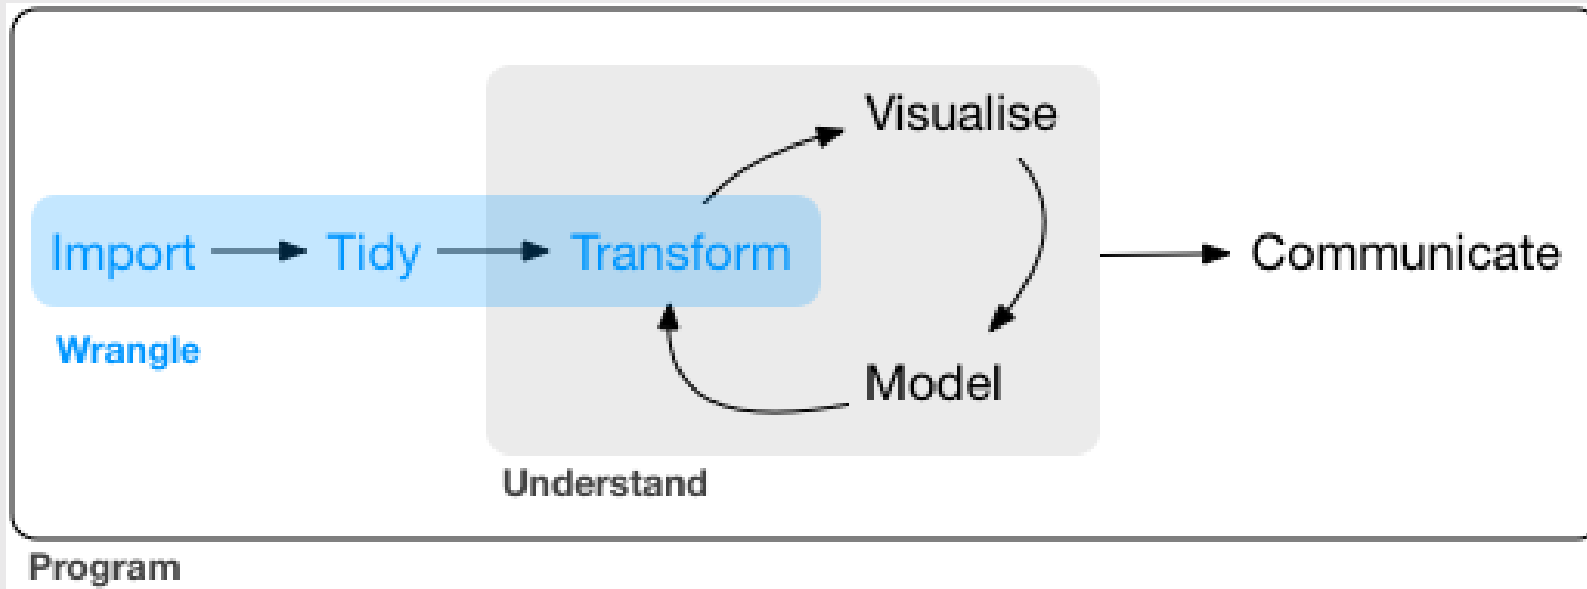



# The main `dplyr` "verbs"

- `select()`: subset columns
- `filter()`: subset rows on conditions
- `arrange()`: sort data frame
- `mutate()`: create new columns by using information from other columns
- `group_by()`: group data to perform grouped operations
- `summarize()`: create summary statistics (usually on grouped data)
- `count()`: count discrete rows

# This week's British Band: **The Spice Girls**

```
spicegirls <- tibble(  
  firstName = c("Melanie", "Melanie", "Emma", "Geri", "Victoria"),  
  lastName  = c("Brown", "Chisholm", "Bunton", "Halliwell", "Beckham"),  
  spice     = c("Scary", "Sporty", "Baby", "Ginger", "Posh"),  
  yearOfBirth = c(1975, 1974, 1976, 1972, 1974),  
  deceased  = c(FALSE, FALSE, FALSE, FALSE, FALSE)  
)  
spicegirls
```

```
#> # A tibble: 5 × 5  
#>   firstName lastName  spice  yearOfBirth deceased  
#>   <chr>      <chr>    <chr>    <dbl> <lgl>  
#> 1 Melanie   Brown    Scary     1975 FALSE  
#> 2 Melanie   Chisholm Sporty    1974 FALSE  
#> 3 Emma      Bunton   Baby     1976 FALSE  
#> 4 Geri      Halliwell Ginger    1972 FALSE  
#> 5 Victoria Beckham  Posh     1974 FALSE
```

Select columns with `select()`

## Subset Variables (Columns)



# Select columns with `select()`

Example: Select the columns `firstName` & `lastName`

## Base R:

```
spicegirls[c('firstName', 'lastName')]
```

```
#> # A tibble: 5 × 2
#>   firstName lastName
#>   <chr>      <chr>
#> 1 Melanie    Brown
#> 2 Melanie    Chisholm
#> 3 Emma      Bunton
#> 4 Geri      Halliwell
#> 5 Victoria  Beckham
```

# Select columns with `select()`

Example: Select the columns `firstName` & `lastName`

**dplyr**: (note that you don't need `""` around names)

```
select(spicegirls, firstName, lastName)
```

```
#> # A tibble: 5 × 2
#>   firstName lastName
#>   <chr>      <chr>
#> 1 Melanie   Brown
#> 2 Melanie   Chisholm
#> 3 Emma      Bunton
#> 4 Geri      Halliwell
#> 5 Victoria  Beckham
```

# Select columns with `select()`

Use the `-` sign to drop columns:

```
select(spicegirls, -firstName, -lastName)
```

```
#> # A tibble: 5 × 3
#>   spice  yearOfBirth deceased
#>   <chr>      <dbl> <lgl>
#> 1 Scary      1975 FALSE
#> 2 Sporty     1974 FALSE
#> 3 Baby       1976 FALSE
#> 4 Ginger     1972 FALSE
#> 5 Posh       1974 FALSE
```

# Select columns with `select()`

Select columns based on name criteria:

- `ends_with()` = Select columns that end with a character string
- `contains()` = Select columns that contain a character string
- `matches()` = Select columns that match a regular expression
- `one_of()` = Select column names that are from a group of names

# Select columns with `select()`

Select only the "name" columns


```
select(spicegirls, ends_with('name'))
```

```
#> # A tibble: 5 × 2
#>   firstName lastName
#>   <chr>      <chr>
#> 1 Melanie    Brown
#> 2 Melanie    Chisholm
#> 3 Emma      Bunton
#> 4 Geri      Halliwell
#> 5 Victoria  Beckham
```



Select rows with `filter()`

## Subset Observations (Rows)

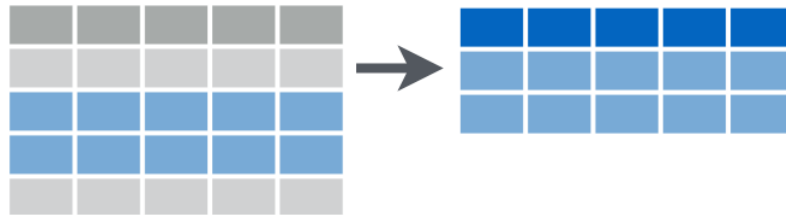

# Select rows with `filter()`

Example: Filter the band members born after 1974

```
## # A tibble: 5 x 5
##   firstName lastName  spice yearOfBirth deceased
##   <chr>      <chr>    <chr>      <dbl> <lgl>
## 1 Melanie   Brown    Scary        1975 FALSE
## 2 Melanie   Chisholm Sporty        1974 FALSE
## 3 Emma      Bunton   Baby         1976 FALSE
## 4 Geri      Halliwell Ginger       1972 FALSE
## 5 Victoria Beckham  Posh         1974 FALSE
```

# Select rows with `filter()`

Example: Filter the band members born after 1974

## Base R:

```
spicegirls[spicegirls$yearOfBirth > 1974,]
```

```
#> # A tibble: 2 × 5  
#>   firstName lastName spice yearOfBirth deceased  
#>   <chr>      <chr>   <chr>      <dbl> <lgl>  
#> 1 Melanie   Brown    Scary       1975 FALSE  
#> 2 Emma     Bunton   Baby        1976 FALSE
```

# Select rows with `filter()`

Example: Filter the band members born after 1974

**dplyr:**

```
filter(spicegirls, yearOfBirth > 1974)
```

```
#> # A tibble: 2 × 5  
#>   firstName lastName spice yearOfBirth deceased  
#>   <chr>      <chr>    <chr>      <dbl> <lgl>  
#> 1 Melanie   Brown    Scary       1975 FALSE  
#> 2 Emma     Bunton   Baby        1976 FALSE
```

# Select rows with `filter()`

Example: Filter the band members born after 1974 **& are named "Melanie"**

**dplyr:**

```
filter(spicegirls, yearOfBirth > 1974 & firstName == "Melanie")
```

```
#> # A tibble: 1 × 5  
#>   firstName lastName spice yearOfBirth deceased  
#>   <chr>      <chr>   <chr>      <dbl> <lgl>  
#> 1 Melanie   Brown    Scary       1975 FALSE
```

# Logic operators for `filter()`

Description	Example
Values greater than 1	<code>value &gt; 1</code>
Values greater than or equal to 1	<code>value &gt;= 1</code>
Values less than 1	<code>value &lt; 1</code>
Values less than or equal to 1	<code>value &lt;= 1</code>
Values equal to 1	<code>value == 1</code>
Values not equal to 1	<code>value != 1</code>
Values in the set <code>c(1, 4)</code>	<code>value %in% c(1, 4)</code>

# Removing missing values

Drop all rows where `variable` is `NA`

```
filter(data, !is.na(variable))
```

# Your turn: wildlife impacts data

1) Create the data frame object `df` by using `here()` and `read_csv()` to load the `wildlife_impacts.csv` file in the `data` folder.

2) Use the `df` object and the `select()` and `filter()` functions to answer the following questions:

- Create a new data frame, `df_birds`, that contains only the variables (columns) about the species of bird.
- Create a new data frame, `dc`, that contains only the observations (rows) from DC airports.
- Create a new data frame, `dc_birds_known`, that contains only the observations (rows) from DC airports and those where the species of bird is known.
- How many *known* unique species of birds have been involved in accidents at DC airports?



# Week 9: *Data Wrangling*

1. Selecting & filtering

2. Sequences with pipes

BREAK

3. Creating new variables

4. Grouped operations

# Create sequences of operations with "pipes"



The Treachery of Images, René Magritte



magrittr package

# Think of `%>%` as the words "...and then..."

**Without Pipes** (read from inside-out):

```
leave_house(get_dressed(get_out_of_bed(wake_up(me))))
```

**With Pipes:**

```
me %>%  
  wake_up() %>%  
  get_out_of_bed() %>%  
  get_dressed() %>%  
  leave_house()
```

# Sequence operations with pipes: %>%

1. Filter the band members born after 1974
2. Select only the columns `firstName` & `lastName`

## Without Pipes:

```
select(filter(spicegirls, yearOfBirth > 1974), firstName, lastName)
```

```
#> # A tibble: 2 × 2
#>   firstName lastName
#>   <chr>      <chr>
#> 1 Melanie   Brown
#> 2 Emma     Bunton
```

# Sequence operations with pipes: %>%

1. Filter the band members born after 1974
2. Select only the columns `firstName` & `lastName`

## With Pipes:

```
spicegirls %>%  
  filter(yearOfBirth > 1974) %>%  
  select(firstName, lastName)
```

```
#> # A tibble: 2 × 2  
#>   firstName lastName  
#>   <chr>      <chr>  
#> 1 Melanie   Brown  
#> 2 Emma     Bunton
```

# Think of the words "...and then..."

## **Without Pipes:**

```
select(filter(spicegirls, yearOfBirth > 1974), firstName, lastName)
```

## **With Pipes:** Note that you don't need to repeat the dataframe name

```
spicegirls %>%  
  filter(yearOfBirth > 1974) %>%  
  select(firstName, lastName)
```

# Sort rows with `arrange()`

Sort the data frame by year of birth:

```
spicegirls %>%  
  arrange(yearOfBirth)
```

```
#> # A tibble: 5 × 5  
#>   firstName lastName  spice  yearOfBirth deceased  
#>   <chr>      <chr>    <chr>    <dbl> <lgl>  
#> 1 Geri      Halliwell Ginger    1972 FALSE  
#> 2 Melanie  Chisholm  Sparty    1974 FALSE  
#> 3 Victoria Beckham   Posh      1974 FALSE  
#> 4 Melanie  Brown     Scary     1975 FALSE  
#> 5 Emma     Bunton    Baby      1976 FALSE
```

# Sort rows with `arrange()`

Use the `desc()` function to sort in descending order:

```
spicegirls %>%  
  arrange(desc(yearOfBirth))
```

```
#> # A tibble: 5 × 5  
#>   firstName lastName  spice  yearOfBirth deceased  
#>   <chr>      <chr>    <chr>    <dbl> <lgl>  
#> 1 Emma      Bunton    Baby      1976 FALSE  
#> 2 Melanie   Brown     Scary      1975 FALSE  
#> 3 Melanie   Chisholm Sporty      1974 FALSE  
#> 4 Victoria Beckham   Posh       1974 FALSE  
#> 5 Geri      Halliwell Ginger     1972 FALSE
```



# Sort rows with `arrange()`

Example of filtering, arranging, and selecting:

```
spicegirls %>%  
  filter(yearOfBirth < 1975) %>%  
  arrange(desc(yearOfBirth)) %>%  
  select(ends_with('name'))
```

```
#> # A tibble: 3 × 2  
#>   firstName lastName  
#>   <chr>      <chr>  
#> 1 Melanie    Chisholm  
#> 2 Victoria   Beckham  
#> 3 Geri       Halliwell
```

# Your turn

- 1) Create the data frame object `df` by using `here()` and `read_csv()` to load the `wildlife_impacts.csv` file in the `data` folder.
- 2) Use the `df` object and `select()`, `filter()`, and `%>%` to answer the following questions:
  - Create a new data frame, `dc_dawn`, that contains only the observations (rows) from DC airports that occurred at dawn.
  - Create a new data frame, `dc_dawn_birds`, that contains only the observations (rows) from DC airports that occurred at dawn and only the variables (columns) about the species of bird.
  - Create a new data frame, `dc_dawn_birds_known`, that contains only the observations (rows) from DC airports that occurred at dawn and only the variables (columns) about the KNOWN species of bird.
  - How many *known* unique species of birds have been involved in accidents at DC airports at dawn?

*Break*

05:00

# Week 9: *Data Wrangling*

1. Selecting & filtering

2. Sequences with pipes

BREAK

3. **Creating new variables**

4. Grouped operations

Create new variables with `mutate()`

## Make New Variables





# Create new variables with `mutate()`

Example: Use the `yearOfBirth` variable to compute the age of each band member

## Base R:

```
spicegirls$age <- 2022 - spicegirls$yearOfBirth
```

## dplyr:

```
spicegirls %>%  
  mutate(age = 2022 - yearOfBirth)
```

```
#> # A tibble: 5 × 6  
#>   firstName lastName  spice  yearOfBirth deceased  age  
#>   <chr>      <chr>    <chr>    <dbl> <lgl>    <dbl>  
#> 1 Melanie    Brown     Scary     1975 FALSE     47  
#> 2 Melanie    Chisholm Sporty     1974 FALSE     48  
#> 3 Emma      Bunton    Baby      1976 FALSE     46  
#> 4 Geri      Halliwell Ginger     1972 FALSE     50  
#> 5 Victoria Beckham  Posh      1974 FALSE     48
```

# You can *immediately* use new variables

```
spicegirls %>%  
  mutate(  
    age = 2022 - yearOfBirth,  
    meanAge = mean(age)) # Immediately using the "age" variable
```

```
#> # A tibble: 5 × 7  
#>   firstName lastName  spice  yearOfBirth deceased   age meanAge  
#>   <chr>      <chr>    <chr>    <dbl> <lgl>     <dbl> <dbl>  
#> 1 Melanie   Brown    Scary     1975 FALSE      47    47.8  
#> 2 Melanie   Chisholm Sporty     1974 FALSE      48    47.8  
#> 3 Emma     Bunton   Baby      1976 FALSE      46    47.8  
#> 4 Geri     Halliwell Ginger    1972 FALSE      50    47.8  
#> 5 Victoria Beckham  Posh      1974 FALSE      48    47.8
```



# Handling if/else conditions

```
ifelse(<condition>, <if TRUE>, <else>)
```

```
spicegirls %>%  
  mutate(  
    yobAfter74 = ifelse(yearOfBirth > 1974, "yes", "no"))
```

```
#> # A tibble: 5 × 6  
#>   firstName lastName  spice  yearOfBirth deceased yobAfter74  
#>   <chr>      <chr>    <chr>      <dbl> <lgl>      <chr>  
#> 1 Melanie   Brown     Scary      1975 FALSE      yes  
#> 2 Melanie   Chisholm Sporty     1974 FALSE      no  
#> 3 Emma     Bunton    Baby       1976 FALSE      yes  
#> 4 Geri     Halliwell Ginger    1972 FALSE      no  
#> 5 Victoria Beckham  Posh      1974 FALSE      no
```

# Your turn

- 1) Create the data frame object `df` by using `here()` and `read_csv()` to load the `wildlife_impacts.csv` file in the `data` folder.
- 2) Use the `df` object with `%>%` and `mutate()` to create the following new variables:
  - `height_miles`: The `height` variable converted to miles (Hint: there are 5,280 feet in a mile).
  - `cost_mil`: Is `TRUE` if the repair costs was greater or equal to \$1 million, `FALSE` otherwise.
  - `season`: One of four seasons based on the `incident_month` variable:
    - `spring`: March, April, May
    - `summer`: June, July, August
    - `fall`: September, October, November
    - `winter`: December, January, February

# Week 9: *Data Wrangling*

1. Selecting & filtering

2. Sequences with pipes

**BREAK**


3. Creating new variables

4. **Grouped operations**

# Split-apply-combine with `group_by`

1. **Split** the data into groups
2. **Apply** some analysis to each group
3. **Combine** the results

# Split-apply-combine with `group_by`

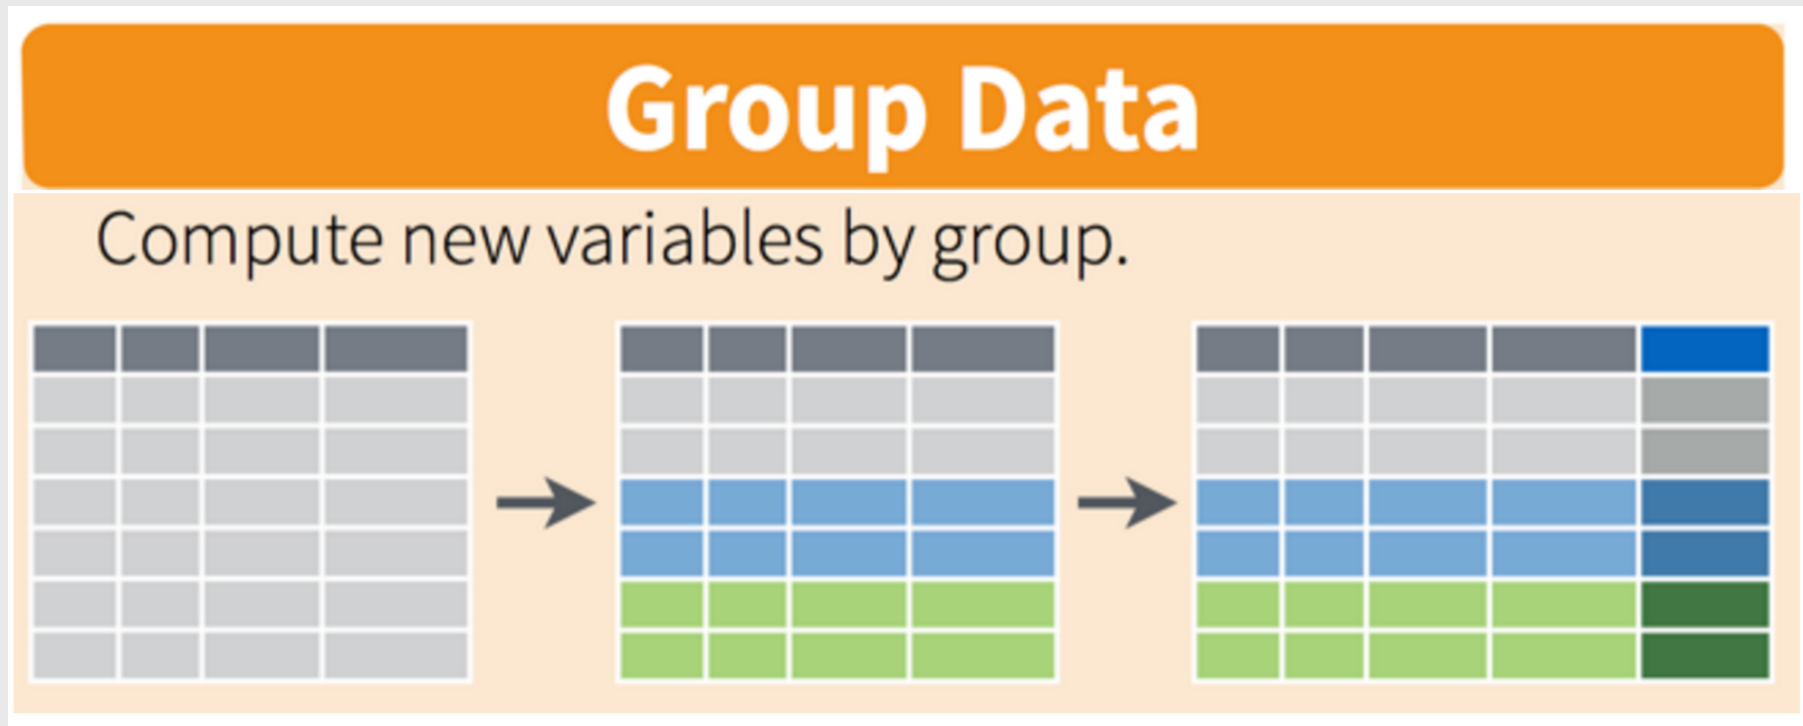

# Split-apply-combine with `group_by`

```
bands
```

```
#> # A tibble: 9 × 5  
#>   firstName lastName  yearOfBirth deceased band  
#>   <chr>      <chr>      <dbl> <lgl>    <chr>  
#> 1 Melanie   Brown        1975 FALSE    spicegirls  
#> 2 Melanie   Chisholm     1974 FALSE    spicegirls  
#> 3 Emma      Bunton       1976 FALSE    spicegirls  
#> 4 Geri      Halliwell    1972 FALSE    spicegirls  
#> 5 Victoria Beckham     1974 FALSE    spicegirls  
#> 6 John      Lennon       1940 TRUE     beatles  
#> 7 Paul      McCartney    1942 FALSE    beatles  
#> 8 Ringo     Starr        1940 FALSE    beatles  
#> 9 George    Harrison     1943 TRUE     beatles
```

# Split-apply-combine with `group_by`

Compute the mean band member age for **each band**

```
bands %>%  
  mutate(  
    age = 2020 - yearOfBirth,  
    mean_age = mean(age)) # This is the mean across both bands
```

```
#> # A tibble: 9 × 7  
#>   firstName lastName yearOfBirth deceased band      age mean_age  
#>   <chr>      <chr>      <dbl> <lgl>    <chr>    <dbl> <dbl>  
#> 1 Melanie   Brown      1975 FALSE    spicegirls 45    60.4  
#> 2 Melanie   Chisholm   1974 FALSE    spicegirls 46    60.4  
#> 3 Emma     Bunton     1976 FALSE    spicegirls 44    60.4  
#> 4 Geri     Halliwell  1972 FALSE    spicegirls 48    60.4  
#> 5 Victoria Beckham   1974 FALSE    spicegirls 46    60.4  
#> 6 John     Lennon     1940 TRUE     beatles    80    60.4  
#> 7 Paul     McCartney  1942 FALSE    beatles    78    60.4  
#> 8 Ringo    Starr      1940 FALSE    beatles    80    60.4  
#> 9 George   Harrison   1943 TRUE     beatles    77    60.4
```

# Split-apply-combine with `group_by`

Compute the mean band member age for each band

```
bands %>%  
  mutate(age = 2020 - yearOfBirth) %>%  
  group_by(band) %>% # Everything after this will be done each band  
  mutate(mean_age = mean(age))
```

```
#> # A tibble: 9 × 7  
#> # Groups:   band [2]  
#>   firstName lastName  yearOfBirth deceased band      age mean_age  
#>   <chr>      <chr>      <dbl> <lg1>   <chr>    <dbl> <dbl>  
#> 1 Melanie    Brown      1975 FALSE   spicegirls 45 45.8  
#> 2 Melanie    Chisholm   1974 FALSE   spicegirls 46 45.8  
#> 3 Emma      Bunton     1976 FALSE   spicegirls 44 45.8  
#> 4 Geri      Halliwell  1972 FALSE   spicegirls 48 45.8  
#> 5 Victoria  Beckham   1974 FALSE   spicegirls 46 45.8  
#> 6 John      Lennon     1940 TRUE    beatles    80 78.8  
#> 7 Paul      McCartney  1942 FALSE   beatles    78 78.8  
#> 8 Ringo     Starr     1940 FALSE   beatles    80 78.8  
#> 9 George    Harrison  1943 TRUE    beatles    77 78.8
```



# Summarize data frames with `summarise()`

## Summarise Data



# Summarize data frames with `summarise()`

Compute the mean band member age for **each band**

```
bands %>%  
  mutate(age = 2020 - yearOfBirth) %>%  
  group_by(band) %>%  
  summarise(mean_age = mean(age)) # Drops all variables except for group
```

```
#> # A tibble: 2 × 2  
#>   band      mean_age  
#>   <chr>      <dbl>  
#> 1 beatles      78.8  
#> 2 spicegirls  45.8
```

# Summarize data frames with `summarise()`

Compute the mean, min, and max band member age for **each band**

```
bands %>%  
  mutate(age = 2020 - yearOfBirth) %>%  
  group_by(band) %>%  
  summarise(  
    mean_age = mean(age),  
    min_age = min(age),  
    max_age = max(age))
```

```
#> # A tibble: 2 × 4  
#>   band      mean_age min_age max_age  
#>   <chr>      <dbl>   <dbl>   <dbl>  
#> 1 beatles      78.8     77     80  
#> 2 spicegirls  45.8     44     48
```

# Computing counts of observations with `n()`

How many members are in each band?

```
bands %>%  
  mutate(age = 2020 - yearOfBirth) %>%  
  group_by(band) %>%  
  summarise(  
    mean_age = mean(age),  
    min_age = min(age),  
    max_age = max(age),  
    numMembers = n())
```

```
#> # A tibble: 2 × 5  
#>   band      mean_age min_age max_age numMembers  
#>   <chr>      <dbl>   <dbl>   <dbl>     <int>  
#> 1 beatles      78.8     77     80         4  
#> 2 spicegirls  45.8     44     48         5
```

# If you only want a quick count, use `count()`

These do the same thing:

```
bands %>%  
  group_by(band) %>%  
  summarise(n = n())
```

```
#> # A tibble: 2 × 2  
#>   band      n  
#>   <chr>   <int>  
#> 1 beatles     4  
#> 2 spicegirls  5
```

```
bands %>%  
  count(band)
```

```
#> # A tibble: 2 × 2  
#>   band      n  
#>   <chr>   <int>  
#> 1 beatles     4  
#> 2 spicegirls  5
```

# If you only want a quick count, use `count()`

You can count multiple combinations

```
bands %>%  
  mutate(nameStartsWithG = str_detect(firstName, '^G')) %>%  
  count(band, nameStartsWithG)
```

```
#> # A tibble: 4 × 3  
#>   band      nameStartsWithG     n  
#>   <chr>      <lgl>          <int>  
#> 1 beatles    FALSE           3  
#> 2 beatles    TRUE            1  
#> 3 spicegirls FALSE           4  
#> 4 spicegirls TRUE            1
```

# Your turn

1) Create the data frame object `df` by using `here()` and `read_csv()` to load the `wildlife_impacts.csv` file in the `data` folder.

2) Use the `df` object and `group_by()`, `summarise()`, `count()`, and `%>%` to answer the following questions:

- Create a summary data frame that contains the mean `height` for each different time of day.
- Create a summary data frame that contains the maximum `cost_repairs_infl_adj` for each year.
- Which *month* has had the greatest number of reported incidents?
- Which *year* has had the greatest number of reported incidents?

# Exporting data

```
ageSummary <- bands %>%
  mutate(age = 2020 - yearOfBirth) %>%
  group_by(band) %>%
  summarise(
    mean_age = mean(age),
    min_age = min(age),
    max_age = max(age),
    numMembers = n())
ageSummary
```

```
#> # A tibble: 2 × 5
#>   band      mean_age min_age max_age numMembers
#>   <chr>      <dbl>   <dbl>   <dbl>     <int>
#> 1 beatles    78.8     77     80         4
#> 2 spicegirls 45.8     44     48         5
```



# Exporting data: `here()` + `write_csv()`

Save the `ageSummary` data frame in your "data" folder:

1) Create a path to where you want to save the data

```
library(here)
savePath <- here('data', 'ageSummary.csv')
```

2) Export the data

```
library(readr)
write_csv(ageSummary, savePath)
```

# HW 9

Make sure you install the package `nycflights13`

```
install.packages('nycflights13')
```

This package includes **5 data frames**:

```
airlines  
airports  
flights  
planes  
weather
```